











# HYBRID SOLAR INVERTER


PV9000-48 Pro 6.5KW



-  Built-in 120A Solar Charger
-  Wide PV Input Voltage Range 60-520V
-  28A MAX PV Input
-  DUAL AC In & Dual AC Out\*
-  Support Meter/CT Connection
-  BMS Support Lithium/Lead-acid Battery
-  Lithium Battery Activation
-  Support Generator ATS Control
-  Feed-in to Grid
-  WiFi Monitoring(optional)

\*Extra interface can be selected as in or out. It cannot support at the same time.

## System Diagram

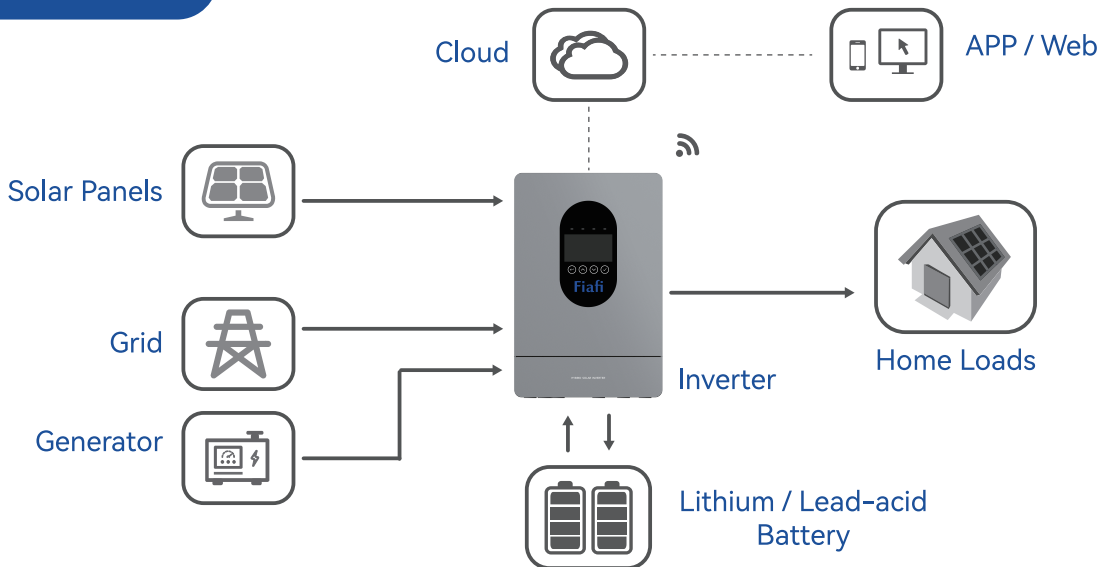

# Specifications



Model	PV9000-48 Pro
<b>AC Input</b>	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
<b>AC Output</b>	
Rated Capacity (kW)	6.5
Surge Power (kVA)	13
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	10min@102%~120%Load, 1min@120%~150%Load 10S@150%~200%Load, 5s@>200%Load
Max. Efficiency (Battery Mode)	93%@48VDC
Parallel Quantity	NA
<b>Charger (PV / AC)</b>	
Solar Charger Type	MPPT
Max PV Input Current / Input Power	28A / 9000W
MPPT Range@Operating Voltage (VDC)	60~450
Max PV Open Circuit Voltage (VDC)	520
Max PV Charge Current (A)	120
Max AC Charge Current (A)	120
Max. Charge Current (PV + AC) (A)	120
<b>Battery</b>	
Rated Voltage (VDC)	48
Floating Charge Voltage (VDC)	54
Overcharge Protection (VDC)	61
Battery Type	Lithium and Lead-acid
<b>Interface</b>	
HMI	LCD
Interface	RS485 / USB / Dry Contact / CT / Meter /
Monitoring	WiFi (Optional)
<b>General Data</b>	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 50 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	10
Dimensions (W*H*D)	514*338*114.5mm
Max. Operating Altitude	4000m (Derating above 1000m)